

198/192 Series 200 mm Wafer Transport Carriers

High performance in an open side wall configuration

Trends in wafer processing technology have mandated advancements in wafer carrier technology to support today's advanced semiconductor processing facilities. Our 198/192 Series 200 mm wafer transport carriers address automation, contamination control, and productivity requirements for today's 200 mm fabs. These open-side wall wafer carriers, designed for advanced wafer transport, offer dramatic performance benefits over traditional low- and midrange wafer carriers, including precise wafer access, reliable equipment operation, and secure wafer protection.



Open-side wall carriers designed for advanced wafer transport.

APPLICATIONS

198/192 series 200 mm wafer transport carriers are ideal for:

- In-fab transport
- Process tool interface
- Storage of fab wafers

FEATURES & BENEFITS

Predictable wafer location	Enables precise wafer access
Automated handling	Enables reliable equipment operation on process tools and automated materials handling systems
Advanced wafer carrier design and materials of construction	Secures and protects wafer against contamination and damage


SPECIFICATIONS

Wafer capacity	25
Pins and holes	on top rail
Locating track notches	at center of the 13th pocket
Side walls	Open
Compatible storage boxes	E99, E210, HA200

Material Specifications

STAT-PRO 9000	Next Generation advanced wafer transport carrier material
	Static dissipative blend of Carbon Nanotube (CNT) enhanced polyetheretherketone (PEEK™) carbon compound
	Temperature limits: 120°C (248°F) continuous use 340°C (644°F) wafer insertion
STAT-PRO 3000	Advanced wafer transport carrier material
	Static dissipative blend of PEEK and carbon fiber
	Temperature limits: 120°C (248°F) continuous use 340°C (644°F) wafer insertion
STAT-PRO 100	Wafer transport carrier material
	Static dissipative blend of polypropylene (PP) and carbon powder
	Temperature limits: 55°C (131°F) continuous use 70°C (158°F) wafer insertion
FluroSentry®	Wafer transport carrier material
	Advanced blend of polybutyleneterephthalate (PBT) and carbon fiber
	Temperature limits: 55°C (131°F) continuous use 95°C (203°F) wafer insertion
Blue Polypropylene	Wafer transport carrier material
	PP with added colorant
	Temperature limits: 55°C (131°F) continuous use 70°C (158°F) wafer insertion

DRAWINGS

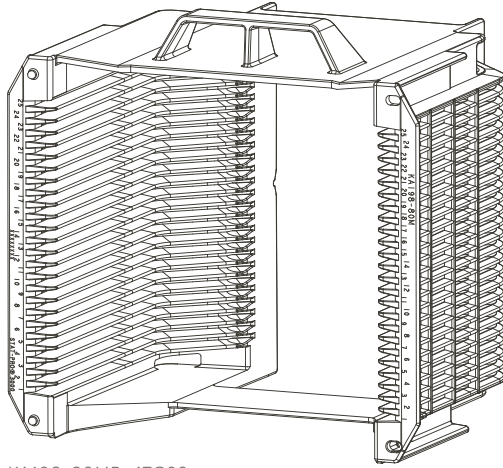

KA198-80MB-47C02

D1 dimension	25.4 mm (1.00"), dependent on cassette
Pocket spacing	6.4 mm (0.25"), dependent on cassette
Pocket flat	1.7 mm (0.07") dependent on cassette

ORDERING INFORMATION

PART NUMBER	END WALL HANDLE TYPE	COLOR	RFID	MATERIALS	"H" BAR END FLANGE
FA192-80MNS-7902	Standard, high position	Black	No	FluoroSentry® carbon fiber PBT	No
FA192-80MNSM-7902	Standard, high position	Black	Yes	FluoroSentry® carbon fiber PBT	No
K198-80M-97C02	Standard, high position	Black	No	STAT-PRO® 9000 CNT PEEK	No
K198-80MB-97C02	Standard, high position	Black	No	STAT-PRO® 9000 CNT PEEK	Yes
KA198-80M-47C02	Standard, high position	Black	No	STAT-PRO® 3000 carbon fiber PEEK	No
KA198-80M-47C05	Standard, high position	Green	No	STAT-PRO® 3000 carbon fiber PEEK	No
KA198-80MB-47C02	Standard, high position	Black	No	STAT-PRO® 3000 carbon fiber PEEK	Yes
KA198-80MNH-47C02	N/A	Black	No	STAT-PRO® 3000 carbon fiber PEEK	Yes

ORDERING INFORMATION

PART NUMBER	END WALL HANDLE TYPE	COLOR	RFID	MATERIALS	"H" BAR END FLANGE
KA198-80MRM-47C02	Standard, high position	Black	Yes	STAT-PRO® 3000 carbon fiber PEEK	No
PA192-80M-0603	Standard, high position	Blue	No	Polypropylene	No
PA192-80M-0604	Standard, high position	Red	No	Polypropylene	No
PA192-80M-0605	Standard, high position	Green	No	Polypropylene	No
PA192-80M-0607	Standard, high position	Yellow	No	Polypropylene	No
PA192-80M-0609	Standard, high position	Orange	No	Polypropylene	No
PA192-80M-0612	Standard, high position	White	No	Polypropylene	No
PA192-80M-0615	Standard, high position	Natural	No	Polypropylene	No
PA192-80MNH-0603	N/A	Blue	No	Polypropylene	No

FOR MORE INFORMATION

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit entegris.com and select the [Contact Us](#) link to find the customer service center nearest you.

TERMS AND CONDITIONS OF SALE

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit entegris.com and select the [Terms & Conditions](#) link in the footer.



Corporate Headquarters
129 Concord
Billerica, MA 01821
USA

Customer Service
Tel +1 952 556 4181
Fax +1 952 556 8022
Toll Free 800 394 4083

Entegris®, the Entegris Rings Design®, and other product names are trademarks of Entegris, Inc. as listed on entegris.com/trademarks. All third-party product names, logos, and company names are trademarks or registered trademarks of their respective owners. Use of them does not imply any affiliation, sponsorship, or endorsement by the trademark owner.

©2001-2022 Entegris, Inc. | All rights reserved. | Printed in the USA | 1110-6138DSA-0822