

GateKeeper® GPU PG1 Gas Purifiers

Superior purity control

GateKeeper® GPU purifiers are the most complete and reliable solution for point-of-use (POU) gas purification. Combining model size with a selection of gas-specific purification materials, GateKeeper GPU purifiers can be tailored to many different customer applications, while maintaining impurity removal to part-per-billion (ppbv) levels or better. Optional valves and a 0.003 micron particle filter are available as well as custom subsystem configurations.

Competitive advantages and benefits

Reliability	Uncompromised process consistency and yield improvement
Performance	State-of-the-art purification technology, low pressure drop, and long lifetimes
Regenerability	Most GateKeeper GPU media are factory regenerable, minimizing potentially hazardous waste
Quality	316L stainless steel, helium leak checked, pressure tested, and analytical testing to part-per-trillion (pptv) levels
Support	Lifetime estimation and regeneration service available through the Entegris, Inc.




SPECIFICATIONS

Lifetime	Consult factory for specific lifetimes
Maximum flow	15 slpm
Nominal flow	10 slpm
Operating pressure	250 psig


†See reverse for arsine and phosphine flowrates.

Pressure Drop Vs. Flow Rate
PG1, .003 µm Particle Filter, Tested in N₂

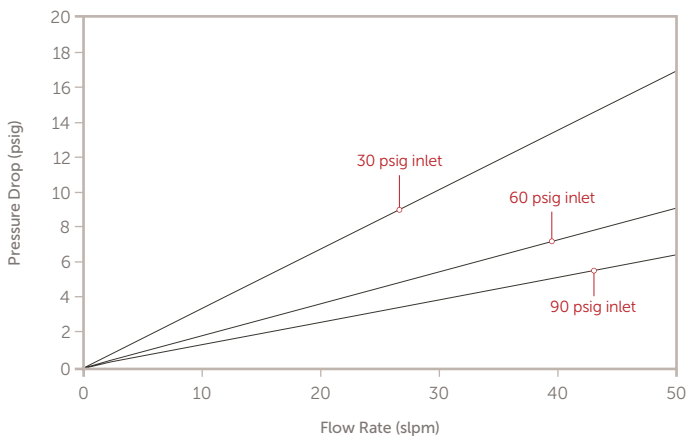

DIMENSIONS

Install vertically with flow downward in direction of arrow.
Consult factory for other mounting options.

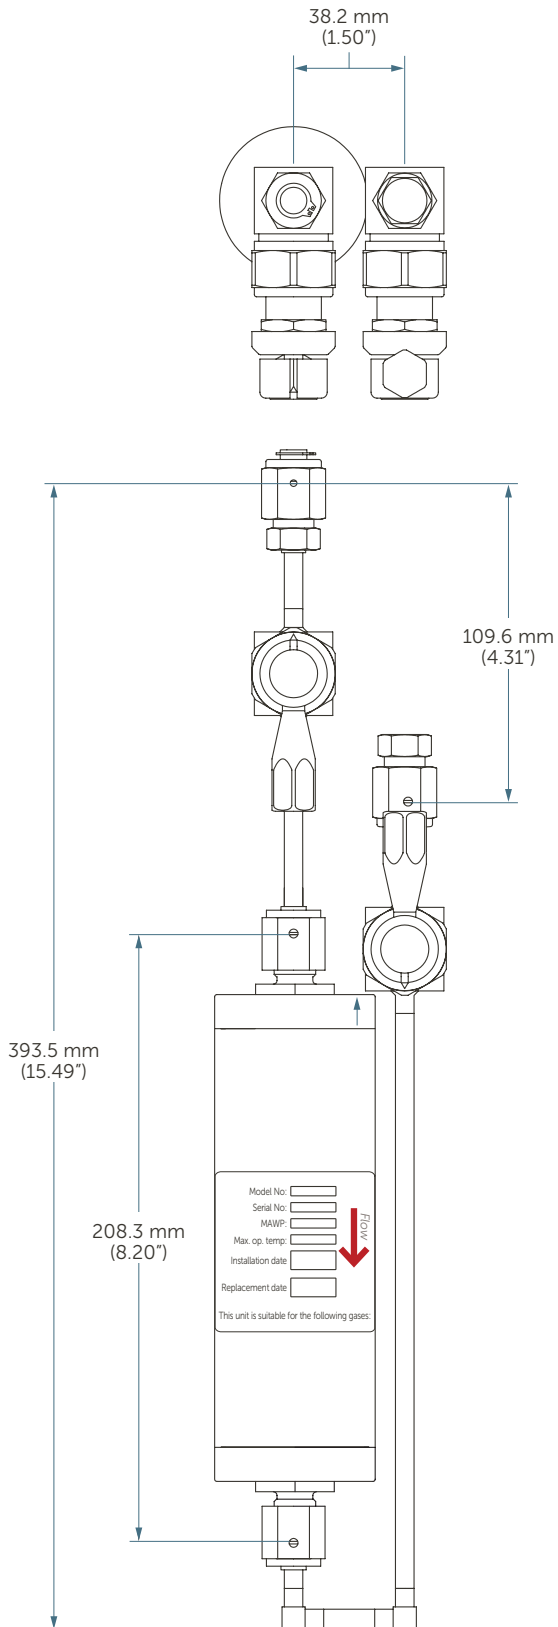

MECHANICAL SPECIFICATIONS

Model	PG1-*FV	PG1-502FV (ARSINE/PHOSPHINE)
Maximum flow	15 slpm	14 slpm
Nominal flow	10 slpm	7 slpm
Material	Body-316L stainless steel	
Filter (outlet)	0.003 micron metal	
Valves	¼" manual diaphragm	¼" manual diaphragm
Max operating pressure	17.3 barg (250 psig) @ 65°C	
Max temp rating	-20 – 65°C (-4 – 149°F)	
Inlet	¼" FVCR	¼" FVCR
Outlet	¼" MVCR	¼" MVCR
Length (face-to-face)	393.4 ±1.3 mm (15.49 ±0.05")	393.4 ±1.3 mm (15.49 ±0.05")
Outside diameter	50.8 mm (2.0")	50.8 mm (2.0")
Width (vlvs open)	127.0 mm (5.0")	127.0 mm (5.0")
Electropolish	Yes	Yes
Leak rating	1x10 ⁻⁹ atm cc/sec of He	1x10 ⁻⁹ atm cc/sec of He
Weight	2.3 kg (5.1 lbs)	2.3 kg (5.1 lbs)

*The three digit number found in the model number equates to the "Media" row in the table below.

PURIFICATION AND REMOVAL CAPABILITIES

Media	GASES PURIFIED	IMPURITIES REMOVED	OUTLET PERFORMANCE	REGENERABLE	DAINGEROUS GOODS (DG) CLASSIFICATION
202	CDA, O ₂ , N ₂ , Ar, He, Kr, Ne, Xe, H ₂ , D ₂ , CO ₂ , N ₂ O, NO, CF ₄	H ₂ O	<1 ppb	YES	Non-DG
203	CDA, O ₂ , N ₂ , Ar, He, Kr, Ne, Xe, H ₂ , D ₂ , N ₂ O, NO, CF ₄	H ₂ O, CO ₂	<100 ppt	YES	Non-DG
		Volatile acids, organics, refractory compounds	<1 ppt		
		Metals	<1 ppb		
302	HCl, Cl ₂ , B ₂ H ₆ , BCl ₃ , CClH ₃ , GeCl ₄ , GeH ₄ , H ₂ S, H ₂ Se, HBr, NF ₃ , SiCl ₄ , SiF ₄ , SiH ₂ Cl ₂ , SiHCl ₃ , SO ₂ , CHClF ₂ , BF ₃	H ₂ O	<1 ppb	NO	Non-DG
		Metals	<1 ppb		
403	N ₂ , Ar, He, Kr, Ne, Xe, H ₂ , CDA, O ₂	Volatile acids, organics, refractory compounds	<1 ppt	NO	Non-DG
		Volatile bases	<5 ppt		
		Metals	<1 ppb		
404	N ₂ , Ar, He, Kr, Ne, Xe, H ₂ , CDA, O ₂ , CO ₂ , C ₂ H ₂ , C ₃ H ₆ , C ₂ H ₄ , NH ₃ , C ₂ H ₆ , C ₃ H ₈ , C ₄ H ₁₀	Organics	<1 pptv	YES	Non-DG
		Metals	<1 ppbv		
502	AsH ₃ , PH ₃	H ₂ O, O ₂	<1 ppb	NO	Non-DG
		Metals	<1 ppbv		
503	H ₂ with up to 1% O ₂ ; O ₂ with up to 2% H ₂	H ₂ in O ₂ , or O ₂ in H ₂	<1 ppmv	NO	Non-DG
602	CO	H ₂ O, O ₂ , CO ₂ , acids, bases, organics, refractories compounds, metals	<1 ppbv	NO	DG – UN3089 Class 4.1
702	NH ₃ , C ₂ H ₇ N, C ₂ H ₈ N ₂ , C ₂ H ₄ , C ₃ H ₆ , CH ₃ SiH ₃ , GeH ₄ , SF ₆ , SiH ₄ , H ₂ /SiH ₄ mixtures	H ₂ O, O ₂ , CO ₂ , NMHCs, metals	<1 ppb	YES	DG – UN3089 Class 4.1
804	CO ₂	H ₂ O, O ₂ , CO, H ₂	<100 ppt	YES	DG – UN2881 Class 4.2
		Volatile acids, organics, refractory compounds	<1 ppt		
		Volatile bases	<5 ppt		
		Metals	<1 ppbv		
805	CO ₂	H ₂ O	<100 ppt	YES	Non-DG
		Volatile acids, organics, refractory compounds	<1 ppt		
		Volatile bases	<5 ppt		
		Metals	<1 ppbv		


Media	GASES PURIFIED	IMPURITIES REMOVED	OUTLET PERFORMANCE	REGENERABLE	DAINGEROUS GOODS (DG) CLASSIFICATION
902	N ₂ , Ar, He, Kr, Ne, Xe, CH ₄ , C ₂ H ₆ , C ₃ H ₈ , C ₄ H ₁₀ , SF ₆ , fluorocarbons	H ₂ O, O ₂ , CO, CO ₂ , H ₂	<100 ppt	YES	DG – UN2881 Class 4.2
		Volatile acids, organics, refractory compounds	<1 ppt		
		Volatile bases	<5 ppt		
		Metals	<1 ppbv		
904	H ₂ , D ₂ , H ₂ -Inerts mix	H ₂ O, O ₂ , CO, CO ₂	<100 ppt	YES	DG – UN2881 Class 4.2
		Volatile acids, organics, refractory compounds	<1 ppt		
		Volatile bases	<5 ppt		
		Metals	<1 ppbv		
906	CDA, O ₂ , N ₂ O	H ₂ O, CO, CO ₂ , NMHC	<1 ppb	YES	Non-DG
		Metals	<1 ppbv		

*NMHCs = organics (C>4); volatile acids are compounds including SO₂, Nox, HCl, H₂S, etc; volatile bases are basic compounds including NH₃ and amines; refractory compounds are hydrocarbons with etheroatoms such as Si, Halogens, P, B, S, or metals.

OTHER SIZES AVAILABLE

Model number	Maximum flow	Average flow
MC1	5 slpm	0.5 slpm
MC50	10 slpm	1.5 slpm
MC190	50 slpm	5 slpm
MC200	50 slpm	5 slpm
MC400	60 slpm	9 slpm
MC450	75 slpm	10 slpm
MC500	100 slpm	12 slpm
MC700	120 slpm	25 slpm
MC1500	250 slpm	40 slpm
MC2525	300 slpm	80 slpm
MC2550	500 slpm	80 slpm
MC3000	500 slpm	80 slpm
MC4500	1000 slpm	200 slpm
MC9000	1000 slpm	300 slpm

ORDERING INFORMATION

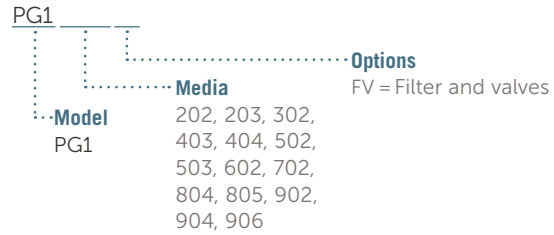

Example: PG1-502FV

Model: PG1

Media: 502

Options: Filter and Valves

FOR MORE INFORMATION

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit entegris.com and select the [Contact Us](#) link to find the customer service center nearest you.

TERMS AND CONDITIONS OF SALE

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit entegris.com and select the [Terms & Conditions](#) link in the footer.



Corporate Headquarters

129 Concord Road
 Billerica, MA 01821
 USA

Customer Service

Tel +1 952 556 4181
 Fax +1 952 556 8022
 Toll Free 800 394 4083

Entegris®, the Entegris Rings Design®, and other product names are trademarks of Entegris, Inc. as listed on entegris.com/trademarks. All third-party product names, logos, and company names are trademarks or registered trademarks of their respective owners. Use of them does not imply any affiliation, sponsorship, or endorsement by the trademark owner.

©2018-2019 Entegris, Inc. | All rights reserved. | Printed in the USA | 7238-10497TAN-0619