




INTELLIGEN® MV DISPENSE SYSTEM

Advanced two-stage system enabling superior dispense and filtration of mid-viscosity fluids

Overview

Building on the proven performance of the two-stage dispense technology combined with Entegris' innovative Connectology® filter design, IntelliGen® MV dispense system integrates high-purity filtration with repeatable dispense of mid-viscosity fluids (100 to 300 cP). The matching Impact® 2 V2 (OF style) filter easily slides into IntelliGen MV's compartment. Fluid passes through the Impact filter at the optimum flow rate for the specified retention rating, improving throughput and increasing uptime.

The integrated, dual-pressure sensor simplifies recipe programming and filter priming with user-friendly dispense diagnostics and real-time alerts in an intuitive programming interface. IntelliGen MV includes several diagnostic features (such as dispense confirmation, cycle time confirmation and ΔP confirmation) that notify when a partial or failed dispense occurs to help minimize costly wafer defects due to coating problems. The state-of-the-art air detection feature pinpoints when air enters the outlet tubing from a leak or from minute air bubble formations that gradually accumulate over time. The compact design, superior performance

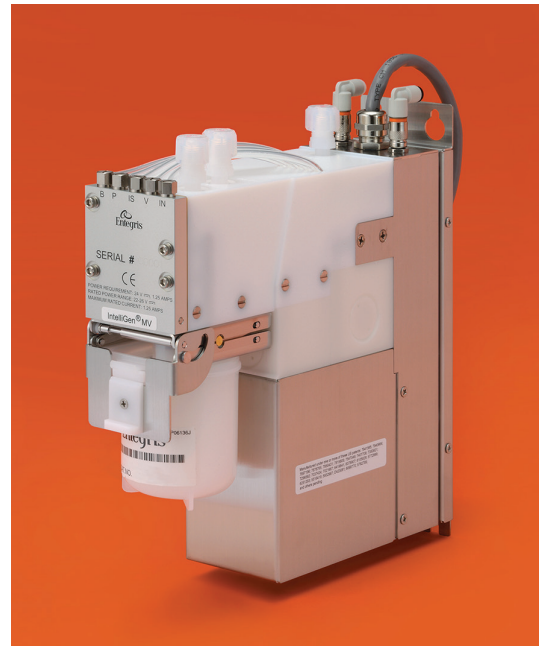

and interactive diagnostics make IntelliGen MV dispense system the right choice to ensure dispense repeatability, longer filter life and a greater return on investment.

Features and Benefits

Features	Benefits
Two-stage dispense technology combined with Connectology filter design	Integrates high-purity filtration with repeatable dispense of mid-viscosity fluids (100–300 cP) <ul style="list-style-type: none"> • Impact 2 V2 (OF style) filter slides into IntelliGen MV's compartment • Fluid passes through the Impact filter at the optimum flow rate for the specified retention rating • Maximize filter performance even in the most sensitive photochemicals
Real-time, interactive diagnostics in intuitive programming interface	Simplifies recipe programming and filter priming Integrates dual-pressure sensor Provides user-friendly dispense diagnostics and real-time alerts <ul style="list-style-type: none"> • Several diagnostic features notify when a partial or failed dispense occurs to help minimize costly wafer defects due to coating problems • State-of-the-art air detection feature pinpoints when air enters the outlet tubing from a leak or from minute air bubble formations that gradually accumulate over time

Specifications


Dispense performance:	Volume	0.1 – 10.0 mL in 0.001 mL increments		
	Rate	0.1 – 3.0 mL/sec in 0.001 mL/sec increments		
	Repeatability	<0.02 mL 3 sigma		
	Viscosity range*	100 – 300 cP		
	Maximum dispense pressure**	0.40 MPa (60 psi)		
Recharge performance:	Fill rate, filtration rate, vent rate, purge rate	0.1 – 3.0 mL/sec in 0.01 mL/sec increments		
	Vent frequency	Auto-venting or 1 – 10,000 dispense cycles		
Mechanical:	Wetted surfaces	Modified PTFE, PTFE, Kalrez®		
	Connection type	Insert style, Super Pillar® or Flowell™ 60 series		
	Filter	Impact® 2 V2 (OF style)		
	Inlet, outlet and vent tubing	OD	6.35 mm (0.25") or 6.0 mm (0.24")	
		ID	3.97 mm (0.15628") or 4.0 mm (0.16")	
	Gas	Inlet gas type	Regulated N ₂ or CDA	
		Inlet gas pressure	448 kPa – 469 kPa (65 psi – 68 psi)	
Vacuum	-68 kPa (20 in -Hg min.)			
Dimensions:	Height	242.6 mm (9.55")		
	Width	60.7 mm (2.39")		
	Depth	235.0 mm (9.25")		
Weight:	Approx. 5 kg (11 lb)			
Electrical:	Current rating	1.25A		
	Input voltage (system)	24 VDC ±10%		
	Serial communication	Specifications are dependent on interface module use		
	Parallel communication	Triggers and acknowledgments		
Certifications:	See provided documentation.			
Environment:	Indoor use only			
	Altitude below 2000 m (2187.22 yd)			
	Ambient temperature 5°C – 40°C (41°F – 104°F)			
	Maximum relative humidity 80% for temperatures up to 31°C (88°F) decreasing linearly to 50% relative humidity at 40°C (104°F)			
	Mains supply fluctuations from 22 – 26 VDC			
	Transient overvoltages of overvoltage category II			
	Pollution degree 2			

*Depends on tool configuration. Contact applications support for detailed window of operation.


**Maximum pressure is a limit on the Window of Operation. Actual volumes and rates may be restricted to comply with the pressure limits for a given viscosity, tubing diameter, tubing length and tubing height.

Performance Data

The following graph shows dispense repeatability trending over a span of 200 dispense cycles.

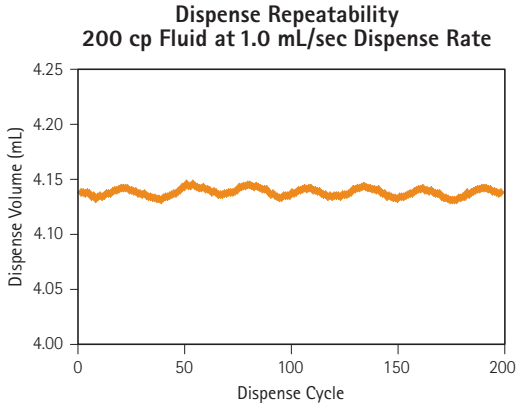


The following graph compares dispense confirmation and air detection performance at a 300 cP chemical level when a 0.3 mL air bubble is introduced into the process.

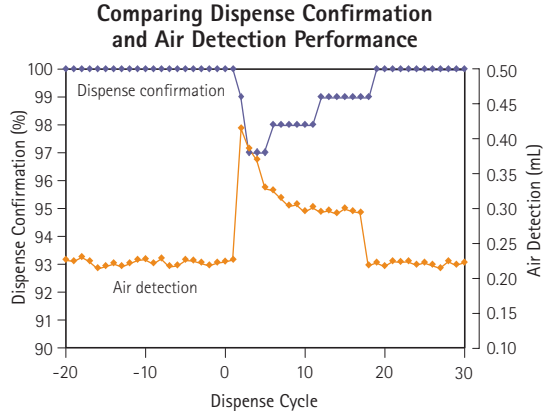

Dimensions

The following drawings show dimensions for all available IntelliGen MV fitting configurations.

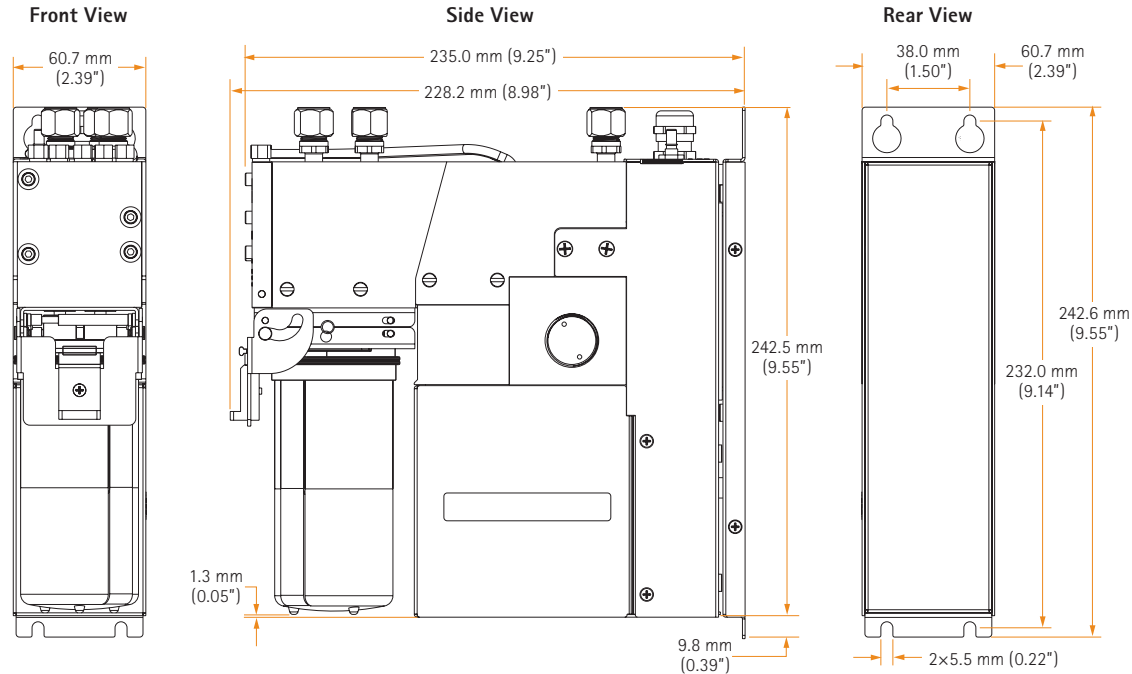

Ordering Information

The first table lists the IntelliGen MV dispense system part numbers. The second table lists part numbers for the corresponding Impact 2 V2 (OF style) filter.

Part Number	Dispense System	Style	Fitting Size	Fitting	Cable Length	Cable Connector
IGMVPVAP1	IntelliGen MV	Vertical	1/4" (6.35 mm)	Super Type Pillar	3.0 m	D-Sub 15-pin
IGMVPVBP1	IntelliGen MV	Vertical	1/4" (6.35 mm)	Super Type Pillar	1.25 m	RDS01 connector
IGMVPHAW2	IntelliGen MV	Horizontal	6 mm	Flowell 60 series	2.0 m	D-Sub 15-pin
IGMVPVCP1	IntelliGen MV	Vertical	1/4" (6.35 mm)	Super Type Pillar	0.8 m	D-Sub 15-pin

Part Number	Filter	Style	Retention	Fitting
A2AZ200K1	Impact 2 V2	OF	50 nm	Kalrez
A2AV200K1	Impact 2 V2	OF	0.1 µm	Kalrez
A2AG200K1	Impact 2 V2	OF	0.2 µm	Kalrez
A2UH200K1	Impact 2 V2	OF	0.5 µm	Kalrez
A2UA200K1	Impact 2 V2	OF	1.0 µm	Kalrez

For More Information

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit www.entegris.com and select the Customer Service link for the center nearest you.

Terms and Conditions of Sale

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit www.entegris.com and select the Legal Notices link from the footer.

Entegris®, the Entegris Rings Design®, Creating a Material Advantage®, Connectology®, IntelliGen® and Impact® are registered trademarks of Entegris, Inc. Kalrez® is a trademark of E.I. du Pont de Nemours and Company. Pillar® is a registered trademark of Nippon Pillar Packaging Company, Ltd. Flowell™ is a trademark of Flowell Corporation.

ENTEGRIS, INC.

Corporate Headquarters | 129 Concord Road | Billerica, MA 01821 USA
Customer Service Tel. +1 952 556 4181 | Customer Service Fax +1 952 556 8022
In North America 800 394 4083 | www.entegris.com