

# Wafergard® III NF Mini/Mini XL In- line Gas Filters

*The nickel filter membrane offers superior particulate filtration in ultrapure gas systems*

Wafergard® III nickel filters are the cleanest, most efficient all-metal filters available. The patented nickel filter membrane offers superior corrosion resistance and excellent compatibility with inert and reactive gases.

A state-of-the-art housing assembly eliminates outgassing by minimizing weld area. The all-metal construction is ideal for high-temperature and dynamic-pressure applications. Its compact size and flexible choice of fittings provide ultimate design efficiency and minimize engineering costs.

## APPLICATIONS

- Ultrapure gas lines
  - High-temperature and dynamic-pressure applications
  - Inert and reactive gases
  - Gas cabinets and panels
  - Valve manifold boxes
  - Hookup
- Note: Not recommended for use with CO, O<sub>3</sub>, and low-level hydride dopant gases

## FEATURES & BENEFITS

<b>Nickel filter membrane</b>	Provides good chemical compatibility with most semiconductor gases, which prevents the use of incompatible filters and gases
<b>Special cleaning and high-temperature baking</b>	Achieve superior initial cleanliness, speeding up gas delivery start-up
<b>High flow rate/low pressure drop characteristics</b>	Suitable for use with low vapor pressure gases
<b>High particle removal efficiency</b>	Contributes to yield improvement




*Ideal for high-temperature and dynamic-pressure applications*

## SPECIFICATIONS


<b>Materials</b>	Filter membrane	Nickel
	Housing, end cap	Low sulfur 316L stainless steel
<b>Initial downstream cleanliness</b>	$\leq 0.03$ particles/liter ( $\leq 1$ particle/ft <sup>3</sup> ) $\geq 0.01$ $\mu\text{m}$	
<b>Removal rating</b>	$\geq 0.0015$ $\mu\text{m}$	
<b>Particle retention</b>	Greater than 99.9999999% (9 LRV) removal of all particles at 60 slm (Mini) and 120 slm (Mini XL): referenced at the most penetrating particle size	
<b>Surface finish interior</b>	$\leq 5$ $\mu\text{in Ra}$	
<b>Helium leak rating</b>	Tested	$9 \times 10^{-10}$ Pa m <sup>3</sup> /sec ( $9 \times 10^{-9}$ atm cc/sec)
<b>Maximum conditions</b>	Maximum operating pressure:	16.2 MPa (162 bar, 2346 psid) at 20°C (68°F)
	Maximum forward/reverse differential pressure:	3.3 MPa (33 bar, 485 psid) @RT
	Maximum design temperature:	Inert gases: 400°C (725°F)
<b>Flow rating</b>	Refer to performance data	

## PERFORMANCE DATA


**Wafergard III NF Mini ¼" VCR**  
WG3NS1RR2

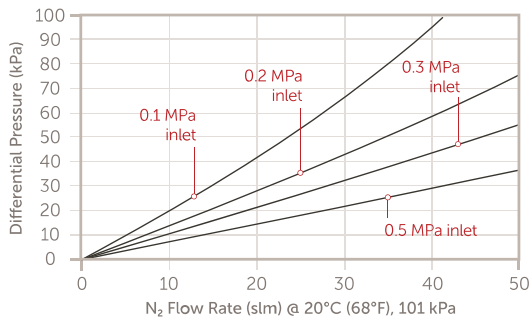

**Wafergard III NF Mini XL ½" VCR**  
WG3NS2RR4

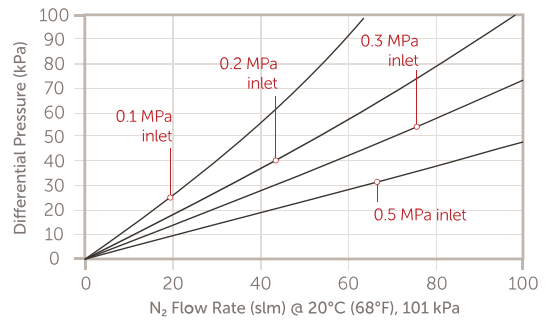


**Wafergard III NF Mini XL ¼" VCR**  
WG3NS2RR2

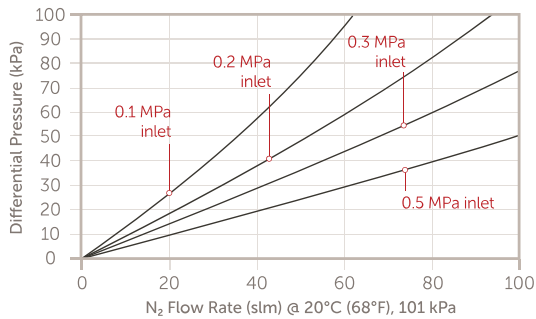


## DIMENSIONS


WG3NS1RR2 1/4" Mini

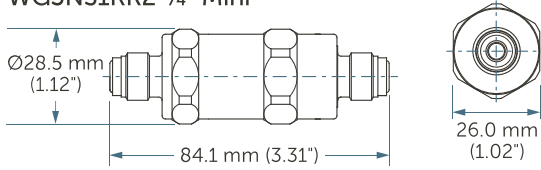

WG3NS2RR2 1/4" Mini XL

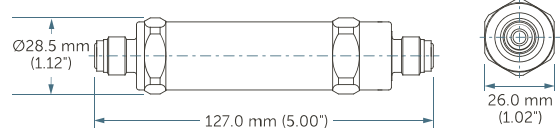

WG3NS2RR4 1/2" Mini XL

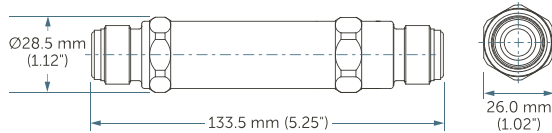

## ORDERING INFORMATION

PART NUMBER	FITTING SIZE AND TYPE	LENGTH
WG3NS1RR2	1/4" Gasket seal (compatible with VCR Fitting) male inlet/outlet	84.1 mm (3.31")
WG3NS2RR2	1/4" Gasket seal (compatible with VCR Fitting) male inlet/outlet	127.0 mm (5.00")
WG3NS2RR4	1/2" Gasket seal (compatible with VCR fitting) male inlet/outlet	133.3 mm (5.25")

### FOR MORE INFORMATION

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit [entegris.com](http://entegris.com) and select the [Contact Us](#) link to find the customer service center nearest you.

### TERMS AND CONDITIONS OF SALE

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit [entegris.com](http://entegris.com) and select the [Terms & Conditions](#) link in the footer.



Corporate Headquarters  
129 Concord  
Billerica, MA 01821  
USA

Customer Service  
Tel +1 952 556 4181  
Fax +1 952 556 8022  
Toll Free 800 394 4083

Entegris®, the Entegris Rings Design®, and other product names are trademarks of Entegris, Inc. as listed on [entegris.com/trademarks](http://entegris.com/trademarks). All third-party product names, logos, and company names are trademarks or registered trademarks of their respective owners. Use of them does not imply any affiliation, sponsorship, or endorsement by the trademark owner.