

Microgard™ Liquid Filters

UPE and nylon liquid filters delivering superior cleanliness and high retention capabilities and eliminating potential sources of contamination in bulk chemical systems

Microgard™ filters deliver high-purity solutions for bulk chemicals and bulk chemical distribution systems, and eliminate potential sources of contamination by removing particles and gels at the start of the process. Manufactured in a world-class cleanroom environment, Microgard filters ensure better initial cleanliness, lower contaminant extractables than polypropylene (PP), and higher chemical compatibility in solvents than polysulfone (PS) or polyethersulfone (PES) membranes.

Choice of UPE or Nylon Membranes

Microgard filters are constructed of ultra-high molecular weight polyethylene (UPE) or nylon membranes, depending on the filter. The UPE membrane, utilized in Microgard Plus, Microgard Plus LE, Microgard UPE, and Microgard UPX, promotes high-purity photochemical filtration with an excellent retention rating. With retention ratings as low as 3 nm, Microgard filters take advantage of some of the tightest membrane technologies available in the market. The asymmetric UPE membrane increases flow and reduces pressure drop, resulting in reduced defects and increased throughput.

The nylon membrane, utilized in Microgard LE Nylon, promotes maximum flow and provides high retention capabilities with its nonsieving retention capabilities. With retention ratings to 10 nm and at twice the thickness of standard nylon filters, Microgard LE Nylon returns twice the performance and ensures low defectivity in advance chemicals. The hydrophilic nylon membrane eliminates prewetting, resulting in reduced chemical usage and less system downtime during filter changeouts.



Optimized for a Variety of Chemical Applications

Microgard filters are optimized for filtration of a variety of chemical applications. Microgard Plus, Microgard Plus LE, Microgard PI, Microgard UPE, and Microgard UPX filters are available in an all-polyethylene construction, while the Microgard LE Nylon filter is constructed of a nylon 6 membrane.

With either construction, these filters provide low surfactant binding, excellent wettability, and superior downstream cleanliness and do not require prewetting, making them ideal for solvent-based chemicals.

Microgard PI filters have been optimized for filtration of polyimide and other high-viscosity chemicals. Additional downstream supports ensure ultimate durability in the most demanding applications.

Table 1 summarizes the Microgard filter attributes.

Table 1. Microgard filter attributes

FILTER TYPE		RETENTION	MEMBRANE	CONSTRUCTION	APPLICATIONS
Microgard	Plus LE	3 nm	Hydrophobic UPE	Asymmetric	Solvent-based chemicals
		5 nm			
		10 nm			
	LE Nylon	10 nm 20 nm	Polyamide (nylon 6)	Asymmetric	Aqueous and solvent-based chemicals
	Plus	10 nm	Hydrophobic UPE	Symmetric	Solvent-based chemicals
		20 nm			
		0.03 µm			
		0.05 µm			
		0.1 µm			
		0.2 µm			
Microgard UPE/UPX		0.05 µm 0.1 µm 0.2 µm	Hydrophobic UPE	Symmetric	Solvent-based chemicals
Microgard PI		0.2 µm 0.5 µm 1.0 µm	Hydrophobic UPE	Symmetric	Polyimide and other high-viscosity chemicals

FEATURES & BENEFITS

FEATURE	BENEFITS	
	UPE FILTRATION	NYLON FILTRATION
Asymmetric and sub 10 nm membrane technology	The asymmetric membrane with retention ratings to 3 nm enables Microgard Plus and Plus LE to increase flow and reduce pressure drop, resulting in reduced defects and increased throughput.	The nylon 6 membrane with retention ratings to 10 nm and at twice the thickness of standard nylon filters enables Microgard LE Nylon to return twice the performance and ensure low defectivity in advance chemicals.
Lower cost of ownership	Microgard filters do not require prewetting with solvent-based photochemicals, resulting in lower operational costs and a more consistent, reliable process.	Microgard LE Nylon eliminates prewetting, resulting in reduced chemical usage while minimizing system downtime during filter changeouts.
Reduced particle contamination	The all-polyethylene UPE construction lowers metallic and ionic contamination that can leach from other materials.	The proprietary cleaning technology of the Microgard LE Nylon filter delivers the lowest levels of organic, metal extractables, and particle shedding.
Optimized for a variety of chemical applications	<p>The Microgard Plus, Microgard Plus LE, Microgard PI, Microgard UPE, and Microgard UPX filters provide low surfactant binding, excellent wettability, and superior downstream cleanliness and do not require prewetting, making them ideal for solvent-based chemicals.</p> <p>Microgard PI has been optimized for filtration of polyimide and other high-viscosity chemicals.</p>	Microgard LE Nylon offers superior wettability, making it ideal for aqueous and solvent-based chemicals.


Microgard Plus, Plus LE, and LE Nylon Filters

SPECIFICATIONS


		PLUS/PLUS LE			LE NYLON		
Materials of construction	Membrane	Hydrophobic UPE			Polyamide (nylon 6)		
	Surface area	4" UPX	10 nm	9200 cm ² (9.9 ft ²)	10"	7000 cm ² (7.5 ft ²)	
			Others	8000 cm ² (8.6 ft ²)			
	10" UPX	10 nm	13,200 cm ² (14.21 ft ²)	20"			14,000 cm ² (15.1 ft ²)
		20 nm	12,000 cm ² (12.9 ft ²)				
		Others	10,000 cm ² (10.7 ft ²)				
	20" UPX	20 nm	24,000 cm ² (25.8 ft ²)	20"			14,000 cm ² (15.1 ft ²)
		Others	20,000 cm ² (21.5 ft ²)				
	30" UPX		30,000 cm ² (32.3 ft ²)				
	10" asym.		11,600 cm ² (12.5 ft ²)				
20" asym.		23,200 cm ² (25 ft ²)					
Supports, core, sleeve	HDPE						
O-ring	EPDM and E-FKM			E-FKM			
Maximum operating conditions	Maximum forward differential pressure: 0.34 MPa (3.4 bar, 50 psid, 3.5 kg/cm ²) @ 20°C (68°F) Maximum reverse differential pressure: 0.24 MPa (2.4 bar 35 psid, 2.5 kg/cm ²) @ 20°C (68°F) Operating temperature: 60°C (140°F)			Maximum forward differential pressure: 0.28 MPa (2.8 bar, 41 psid, 2.9 kg/cm ²) @ 20°C (68°F) Maximum reverse differential pressure: 0.21 MPa (2.1 bar, 31 psid, 2.2 kg/cm ²) @ 20°C (68°F) Operating temperature: 50°C (122°F)			

PERFORMANCE DATA


Microgard Plus 10" Filters

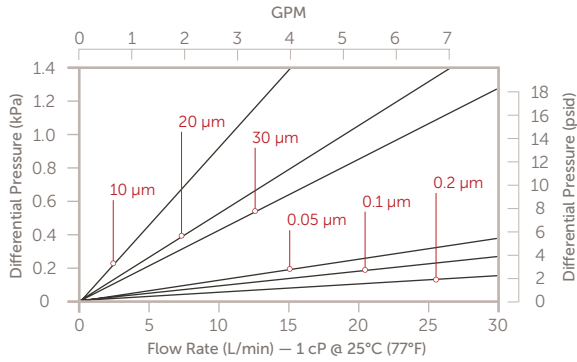

Microgard Plus LE 10" Asymmetric UPE Filters

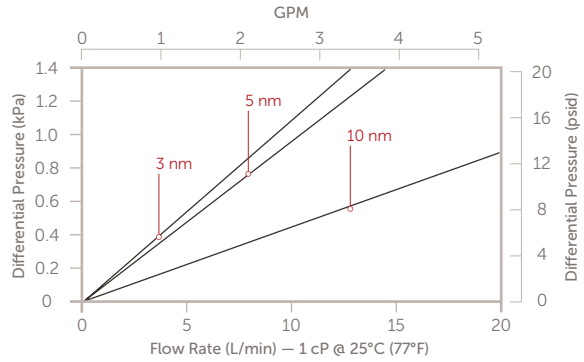


Microgard LE Nylon 10" Cartridge Filters

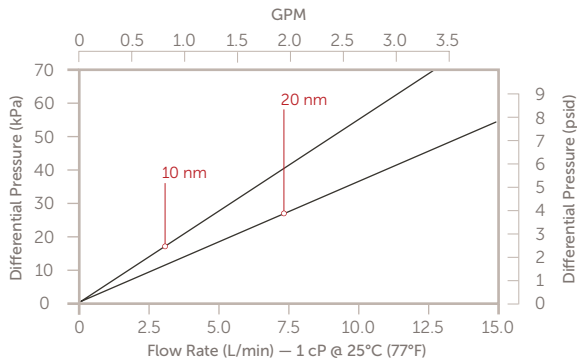


DIMENSIONS

Microgard Plus/Plus LE/LE Nylon


Code 0

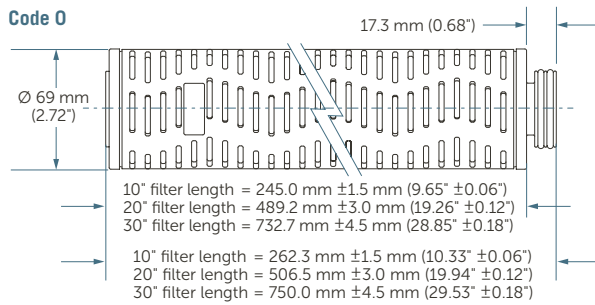

Code 0 4" UPX

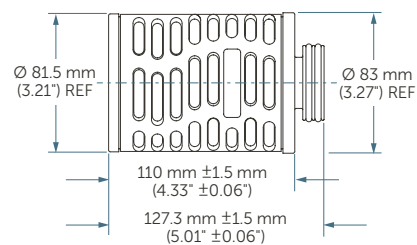


End View Chemlock® Key on Cartridge

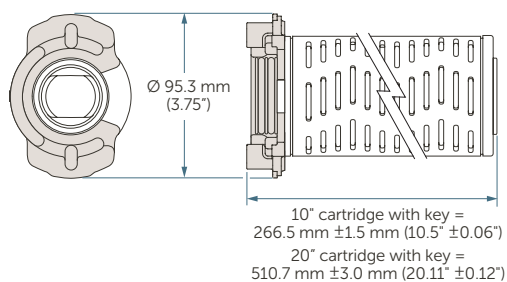

ORDERING INFORMATION

This information serves as a guide (these technical notes included infrequently).

Microgard Plus /Plus LE / LE Nylon Filters: part number

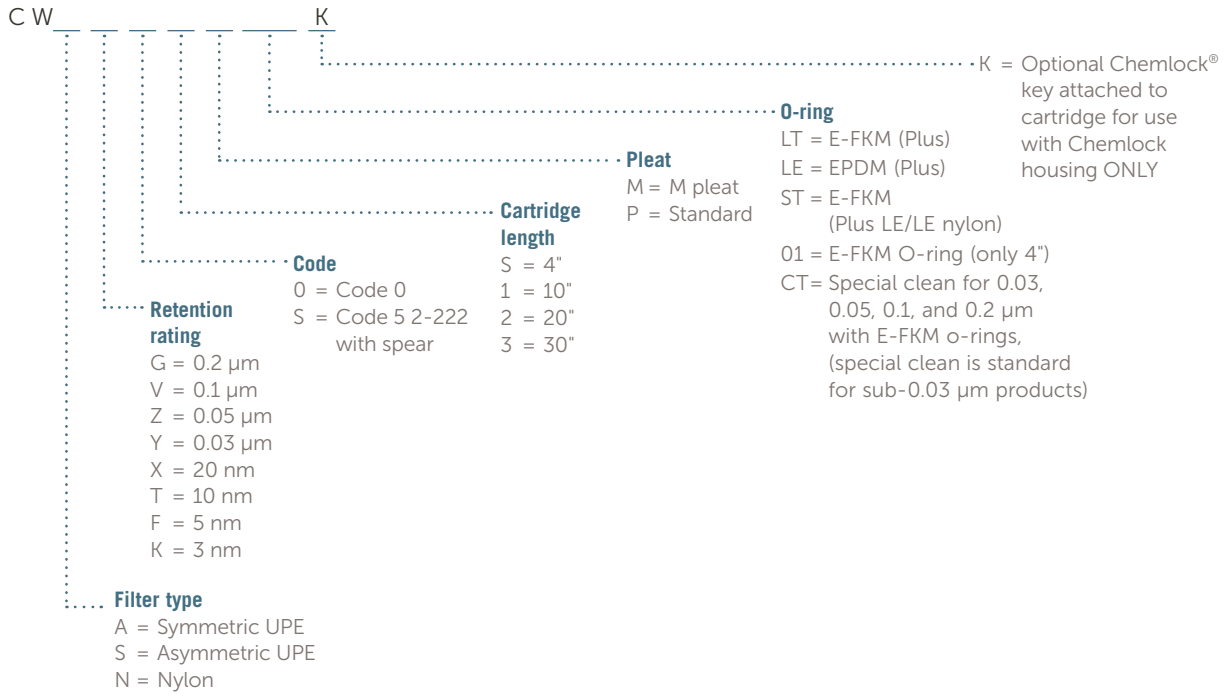


Microgard UPE/UPX Filters

SPECIFICATIONS


		UPE		UPX	
Materials of construction	Membrane	Hydrophobic UPE			
	Surface area	10"	8500 cm ² (9.1 ft ²)	4"	5000 cm ² (5.4 ft ²)
		20"	17,000 cm ² (18.3 ft ²)	10"	11,000 cm ² (11.8 ft ²)
	30"	25,500 cm ² (27.4 ft ²)			
	Supports, core, sleeve	HDPE			
	O-ring	E-FKM, EPDM		E-FKM or Kalrez® perfluoroelastomer	
Maximum operating conditions	Maximum forward differential pressure: 0.35 MPa (3.5 bar, 50 psid, 3.5 kg/cm ²) @ 25°C (77°F)				
	Maximum reverse differential pressure: 0.27 MPa (2.7 bar, 40 psid, 2.8 kg/cm ²) @ 20°C (68°F)				
	Operating temperature: 60°C (140°F)				

PERFORMANCE DATA

Microgard UPE Cartridge Filters

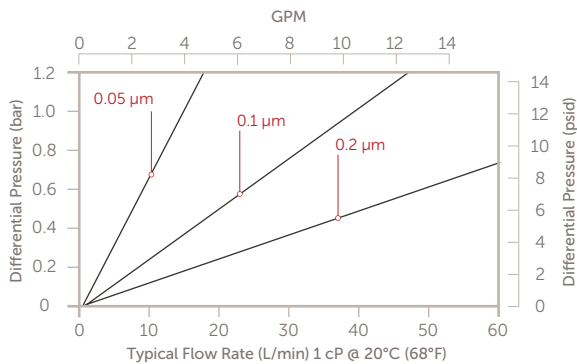


Microgard UPX Cartridge Filters

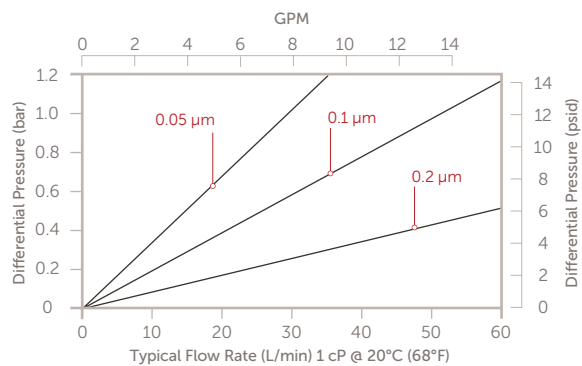


DIMENSIONS

Microgard UPE


Code 0

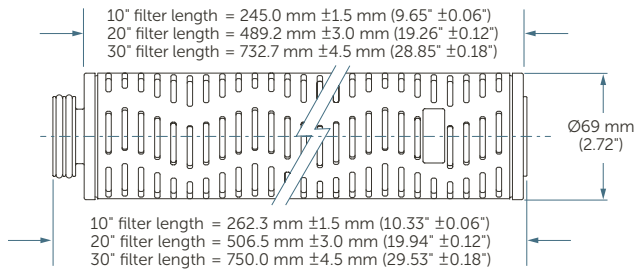

End View Chemlock Key on Cartridge

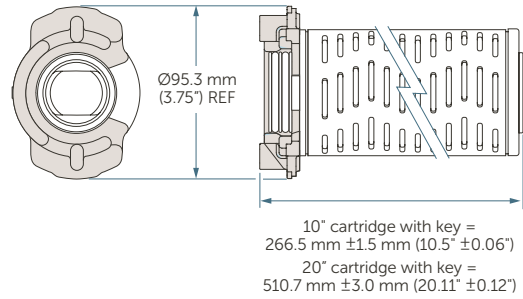


Code 5

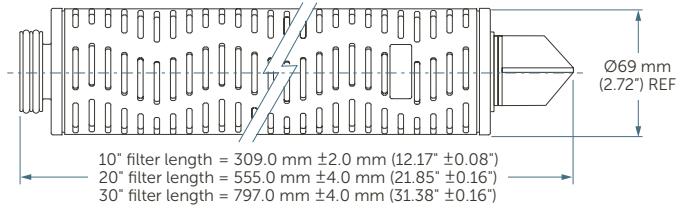


Microgard UPX

Code 0

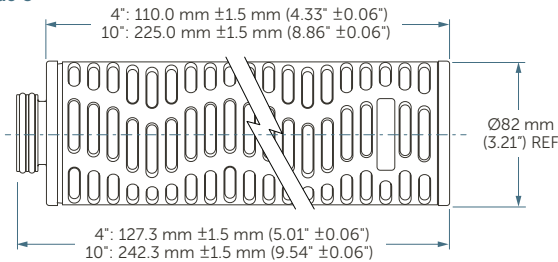


End View Chemlock Key on Cartridge

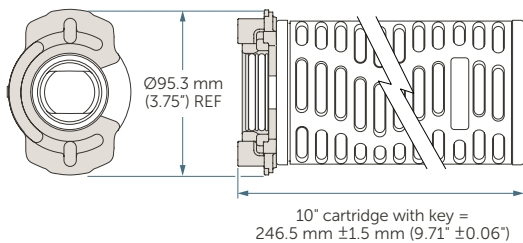


ORDERING INFORMATION

This information serves as a guide. Please contact your local representative to confirm part numbers.

Microgard UPE Cartridge Filters: part number

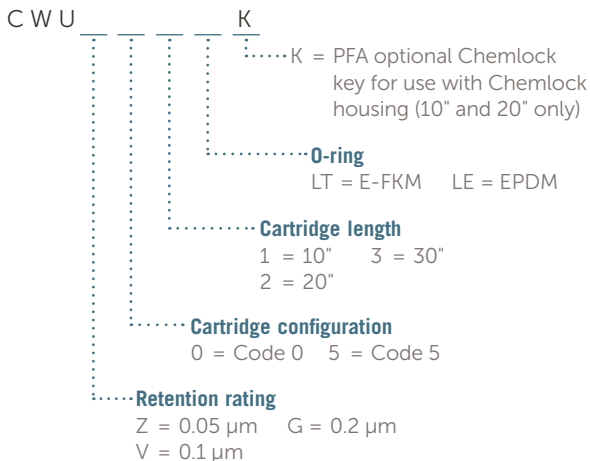

Microgard UPX Cartridge Filters: part number

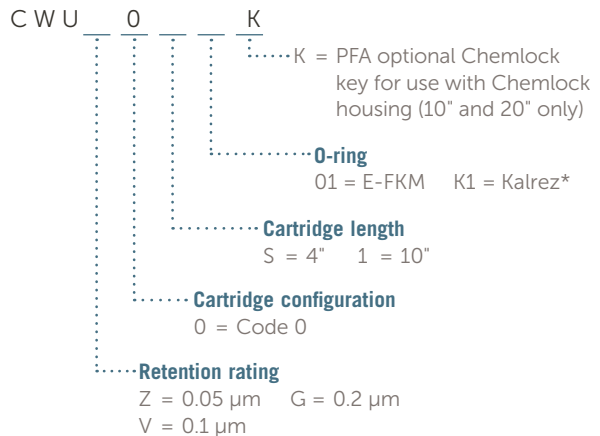

*Kalrez O-ring available in 10" configuration only.


Microgard PI Filters

SPECIFICATIONS

Materials of construction	Membrane	Hydrophobic UPE	
	Surface area	0.2 μm	8800 cm^2 (9.47 ft^2)
		0.5 μm , 1.0 μm	8000 cm^2 (8.6 ft^2)
	Supports, core, sleeve	HDPE	
O-ring	E-FKM		
Maximum operating conditions	Maximum forward differential pressure:	0.39 MPa (3.9 bar, 56.6 psid, 4 kg/cm^2) @ 25°C (77°F)	
	Maximum reverse differential pressure:	0.255 MPa (2.55 bar, 39.3 psid, 2.8 kg/cm^2) @ 25°C (77°F)	
	Operating temperature:	60°C (140°F)	

PERFORMANCE DATA

Microgard PI 10" Cartridge Filters

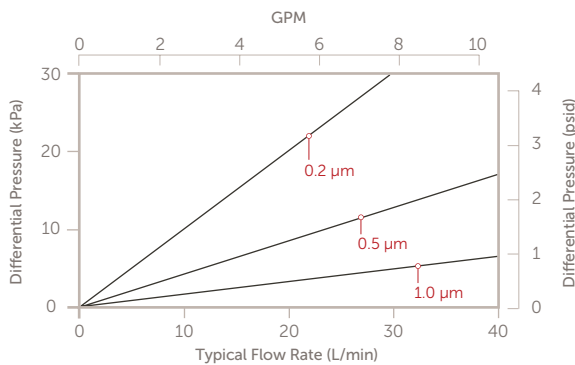

ORDERING INFORMATION

This information serves as a guide. Please contact your local representative to confirm part numbers.

Microgard PI Cartridge Filters: part number

PIA_01P01K_


.....K = Optional Chemlock key attached to cartridge for use with Chemlock housing ONLY

Retention rating


- G = 0.2 μm
- H = 0.5 μm
- A = 1.0 μm

DIMENSIONS

Microgard PI

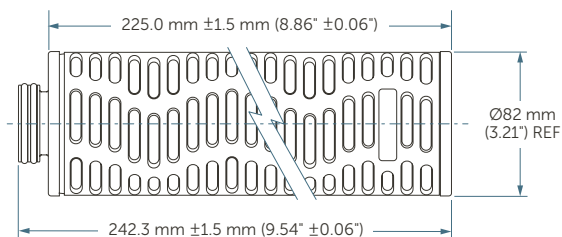

End View Chemlock Key on Cartridge

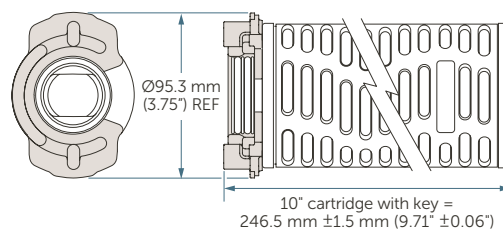

FOR MORE INFORMATION

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit entegris.com and select the [Contact Us](#) link to find the customer service center nearest you.

TERMS AND CONDITIONS OF SALE

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit entegris.com and select the [Terms & Conditions](#) link in the footer.



Corporate Headquarters

129 Concord Road
Billerica, MA 01821
USA

Customer Service

Tel +1 952 556 4181
Fax +1 952 556 8022
Toll Free 800 394 4083

Entegris®, the Entegris Rings Design®, and other product names are trademarks of Entegris, Inc. as listed on entegris.com/trademarks. All third-party product names, logos, and company names are trademarks or registered trademarks of their respective owners. Use of them does not imply any affiliation, sponsorship, or endorsement by the trademark owner.

©2013-2019 Entegris, Inc. | All rights reserved. | Printed in the USA | 4418-7392ENT-0519