Trinzik[™] UPW T015 Ultrapure Water Filter

Reliably control defect-causing contaminants in bulk ultrapure and DI water applications

Trinzik™ T015 UPW filters are designed for highest-performance filtration of bulk ultrapure and deionized (DI) water in facilities and point-of-tool applications. These filters provide excellent retention of defect-causing contaminants, and are suited for water filtration in semiconductor, hard disk drive manufacturing, flat panel display (LCD, LED, OLED, AMOLED, plasma), and solar/photovoltaic industries.



High flow rate filtration in facilities and point-of-tool applications

APPLICATIONS

Designed for ultrapure and DI water filtration in bulk facilities and point-of-tool applications within the semiconductor, hard disk drive manufacturing, flat panel display (LCD, LED, OLED, AMOLED, plasma) and solar/photovoltaic industries including:

- Make-up loops
- Polish loops
- UPW final filtration/ UF alternative
- Resin trap and general process tool water
- Low cost of ownership alternative to ultrafiltration (UF)
- Advanced UF guard filters

FEATURES & BENEFITS

High-porosity, hydrophilic PTFE membrane	Enables high flow rate performance and reduces operational costs
Small pore size membrane design	Advanced particle removal increases yield
HDPE construction	Lower extractables ensure clean filtration operations




SPECIFICATIONS


Materials of construction	Membrane	Surface modified, hydrophilic PTFE	
	Supports, core, sleeve	HDPE	
	O-ring	E-FKM, E-ETP, EPR, E-SIL, FKM, Kalrez® (4079UP), Kalrez (6375UP)	
Retention rating	Sub-10 nm		
Cartridge connections	Code 0 (222 Flat), Code 5 (222 Fin)		
Maximum operating	Maximum forward differential pressure:		
conditions	5.5 bar (80 psid) @ 25°C (77°F)		
	1.7 bar (25 psid) @ 80°C (176°F)		
	Maximum reverse differential pressure:		
	3.4 bar (50 psid) @ 25°C (77°F)		
	Maximum temperature:		
	60°C (140°F)		
Dimensions	Length	10", 20", 30"	
	Diameter	69 mm (2.7")	

PERFORMANCE DATA


Trinzik UPW T015 10" Cartridges



Trinzik UPW T015 20" Cartridges




Trinzik UPW T015 30" Cartridges



DIMENSIONS

Trinzik UPW T015 Filter

Code 0 - 222 Flat




DIMENSIONS

Length	A	В
10"	276.1 mm (10.9")	257.8 mm (10.2")
20"	522.5 mm (20.6")	504.2 mm (19.9")
30"	766.3 mm (30.2")	748.0 mm (29.5")

Trinzik UPW T015 Filter

Code 5 - 222 Fin




DIMENSIONS

Length	Α	В
10"	315.0 mm (12.4")	298.5 mm (11.8")
20"	561.3 mm (22.1")	544.8 mm (21.5")
30"	805.2 mm (31.7")	788.7 mm (31.1")

ORDERING INFORMATION

Trinzik UPW T015 Ultrapure Water Filters: part number

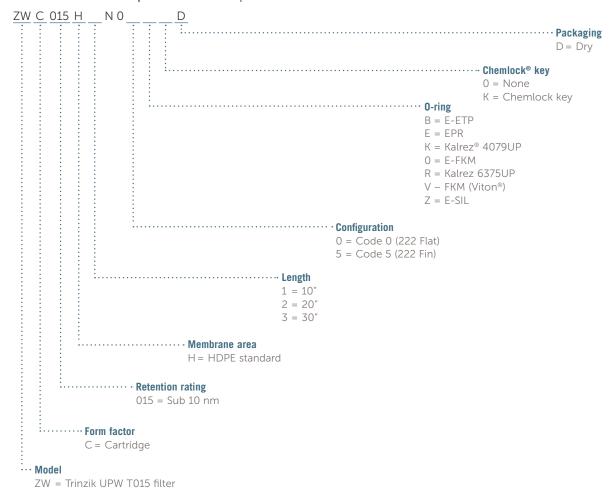

FOR MORE INFORMATION

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit <u>entegris.com</u> and select the <u>Contact Us</u> link to find the customer service center nearest you.

TERMS AND CONDITIONS OF SALE

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit <u>entegris.com</u> and select the <u>Terms & Conditions</u> link in the footer.



Corporate Headquarters
129 Concord Road
Billerica, MA 01821

Customer Service
Tel +1 952 556 4181
Fax +1 952 556 8022

Fax +1 952 556 8022 Toll Free 800 394 4083

Entegris®, the Entegris Rings Design®, and other product names are trademarks of Entegris, Inc. as listed on entegris.com/trademarks. All third-party product names, logos, and company names are trademarks or registered trademarks of their respective owners. Use of them does not imply any affiliation, sponsorship, or endorsement by the trademark owner.

@2021-2025 Entegris, Inc. $\,|\,\,$ All rights reserved. $\,|\,\,$ Printed in the USA $\,|\,\,$ 4454-11456ENT-1125