

GateKeeper® GPU 5000 Gas Purifiers

Superior purity control

Entegris' GateKeeper® GPU gas purifiers were designed to improve purity consistency, lifetime and final purity. Leveraging its expertise in material science, Entegris has developed a new generation of purification products that deliver unsurpassed value and performance. The model 5000 is designed for peak flow rates up to 800 slpm.




FEATURES & BENEFITS

Process control and protection	<p>Purity control to ppt levels</p> <p>Low pressure drop across the purifier</p> <p>CE certified to the Pressure Equipment Directive (PED) and manufactured in an ISO® 9001:2000 facility</p>
Cost effective	<p>Regenerable – eliminates disposal issues and costs</p> <p>Long lifetime – improved cost of ownership</p>
Safe and simple to use	<p>Use ambient temperature purification – no heat or power required to operate</p> <p>Insensitive to orientation (horizontal/vertical)</p>

PERFORMANCE DATA

Pressure Drop vs. Gas Flow Rate*

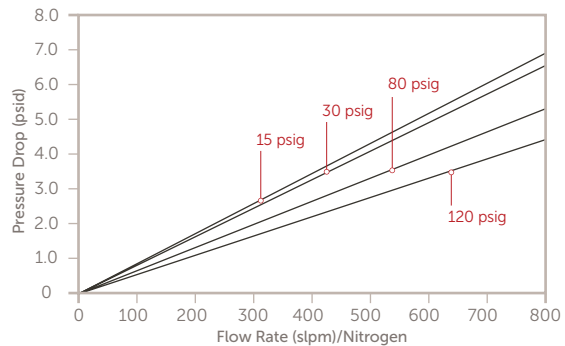

*The flow rate displayed on this graph may exceed maximum flow rate specification of the purifier model referenced in this data sheet. Please refer to maximum flow rate in the specifications section of this data sheet.

Note: Pressure drop may vary depending on media type.

SPECIFICATIONS

Materials of construction (housing)	316L stainless steel, electropolished
Particle filtration type	Wafergard® – 316L stainless steel membrane
Particle retention	Up to 3 LRV* for particles larger than 0.003 µm
Filtration removal rating	≥0.003 µm
Operating temperature	0 – 65°C (32–149°F)
Fitting size and type	½" gasket seal**
Fitting configuration	Male-to-male
Operating pressure	1.01 barg–34.8 barg (0 psig–505 psig)
Maximum flow rate	800 slpm
Leak rating	1 × 10 ⁻⁹ atm cc/sec
Dimensions	785 mm (30.9") L × Ø102 mm (4")
Approximate weight	10 kg (22 lbs)

*Referenced as most penetration particle size.

**Also referred to as VCR® or face seal.

AVAILABLE MEDIA

Media	Gases purified	Contaminants removed	Outlet purity	Nominal flow rate ³
DZ	CO ₂	Volatile acids	<1 ppt	144 slpm
		Volatile bases	<1 ppt	
		Refractories	<1 ppt	
		Condensable organics	<1 ppt	
		H ₂ O	<1 ppb	
		O ₂	<200 ppt	
EX	H ₂ , N ₂ , Noble gases, H ₂ /N ₂ , H ₂ /Noble gases	H ₂ O, CO ₂	<100 ppt in H ₂ and N ₂	225 slpm
		O ₂	<250 ppt in H ₂ and N ₂	
		CO	<1 ppb in H ₂ and N ₂	
		C _x H _y (45–100 amu)	<10 ppt	
		C _x H _y (>100 amu)	<1 ppt	
		Refractory compounds (as HMDSO)	<1 ppt	

AVAILABLE MEDIA (CONTINUED)

Media	Gases purified	Contaminants removed	Outlet purity	Nominal flow rate ³
HX	H ₂ , N ₂ , Noble gases, H ₂ /N ₂ , H ₂ /Noble gases	H ₂ O, O ₂ , CO, CO ₂	<100 ppt in H ₂ and N ₂	225 slpm
IX	N ₂ , Noble gases	H ₂ O, O ₂ , CO, CO ₂ , H ₂	<100 ppt in Ar and N ₂	114 slpm
	Freon ¹ 13, 14, 23, 41, 116, 218	H ₂ O, O ₂		
NX	O ₂	CO ₂	<1 ppb	327 slpm
		H ₂ O	<1 ppb	
OP	CDA, N ₂ , Noble gases	H ₂ O	<100 ppt in N ₂	240 slpm
		Condensable organics (as Toluene)	<1 ppt	
		Non-condensable organics ² (as Butane)	<5 ppt	
		Refractory compounds (as HMDSO)	<1 ppt	
		Volatile acids (as SO ₂)	<1 ppt	
		Volatile bases (as NH ₃)	<10 ppt	
SX	NH ₃	H ₂ O	<2 ppb in NH ₃	107 slpm
		CO ₂	<1 ppb	
		O ₂	<1 ppb	
		Hydrocarbons	<1 ppt	
TX	CDA, N ₂ , Noble gases, CO ₂ , NH ₃	Condensable organics (as Toluene)	<1 ppt	320 slpm ⁴
		Non-condensable organics ² (as Butane)	<5 ppt	
		Refractory compounds (as HMDSO)	<1 ppt	
WX	CDA, H ₂ , N ₂ , Noble gases, CO ₂ , NH ₃ , AsH ₃ , PH ₃ , GeH ₄ , SiH ₄	H ₂ O	<100 ppt in N ₂	950 slpm ⁵
			<12 ppb in NH ₃	

¹ Removal of H₂O and O₂ only.

² Consult Entegris with specific non-condensable contaminants.


³ With a 1 ppm H₂O impurity inlet challenge

⁴ With a 1 ppm Toluene impurity inlet challenge over 1 year

⁵ Lifetime will exceed 1 year at its maximum flow rate

ORDERING INFORMATION

GateKeeper 5000 Gas Purifiers: part number

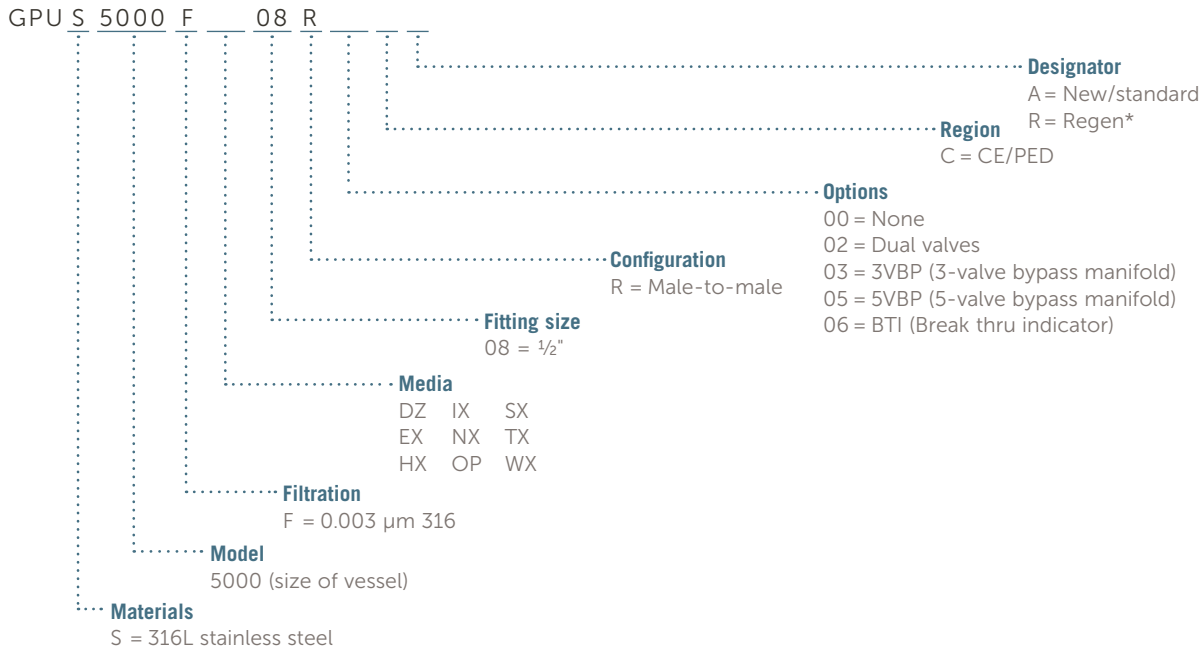

*Contact Entegris to determine if the purifier is designed for regeneration.

FOR MORE INFORMATION

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit entegris.com and select the Contact Us link to find the customer service center nearest you.

TERMS AND CONDITIONS OF SALE

All purchases are subject to Entegris' Terms and Conditions of Sale. To view and print this information, visit entegris.com and select the Terms & Conditions link in the footer.



Corporate Headquarters
129 Concord Road
Billerica, MA 01821
USA

Customer Service
Tel +1 952 556 4181
Fax +1 952 556 8022
Toll Free 800 394 4083

Entegris®, the Entegris Rings Design™, Pure Advantage™, and other product names are trademarks of Entegris, Inc. as listed on entegris.com/trademarks. All third-party product names, logos, and company names are trademarks or registered trademarks of their respective owners. Use of them does not imply any affiliation, sponsorship, or endorsement by the trademark owner.
©2015-2017 Entegris, Inc. | All rights reserved. | Printed in the USA | 4521-7890ENT-1117